



FP3 serija kućišta filtera

FP3 filter kućišta sa mesinganim ojačanjem i providnim kućištem

Šifra	Model	Dužina	Ulaz/izlaz (")	Dimenzije A x B (mm)
A2010030	FP3	9 3/4"	1/2" UN	122 X 294
A2010040		20"		122 X 565
A2010070	FP3	9 3/4"	3/4" UN	122 X 294
A2010080		20"		122 X 565
A2010110	FP3	9 3/4"	1" UN	122 X 299
A2010120		20"		122 X 570
A2010150	FP3	9 3/4"	1 1/4" UN*	126 X 319
A2010160		20"		126 X 580
A2010170	FP3	9 3/4"	1 1/2" UN*	126 X 325
A2010180		20"		126 X 586

\* koriste se posebni filter ulošci sa unutrašnjim otvorom od 32 mm



FP3 filter kućišta sa mesinganim ojačanjem i providnim kućištem

Šifra	Model	Dužina	Ulaz/izlaz (")	Dimenzije A x B (mm)
A2010030	FP3	9 3/4"	1/2" UN	122 X 294
A2010040		20"		122 X 565
A2010070	FP3	9 3/4"	3/4" UN	122 X 294
A2010080		20"		122 X 565
A2010110	FP3	9 3/4"	1" UN	122 X 299
A2010120		20"		122 X 570
A2010150	FP3	9 3/4"	1 1/4" UN*	126 X 319
A2010160		20"		126 X 580
A2010170	FP3	9 3/4"	1 1/2" UN*	126 X 325
A2010180		20"		126 X 586

\* koriste se posebni filter ulošci sa unutrašnjim otvorom od 32 mm



## Kratak opis

FP3 serija kućišta filtera je sa mesinganim ojačanjem navojnih priključaka, providnim SAN ili belim PP kućištem. Široka paleta filter uložaka ih čini veoma primenljivim u različitim vidovima filtracije.




## Tehničke karakteristike

Glava filtera	PP sa mesinganim ojačanjem navoja
Držač filter uloška	providno - SAN, belo - PP
Matica	PP
O-ring	NBR 70 Sh A
Radni pritisak	8 bar max
Pritisak pucanja	35 bar
Radna temperatura	minimalna 5°C, maksimalna 50°C
Protok (bez filtera) na 2 bar	1/2": 106,60 l/min, 3/4": 108,50 l/min 1": 106,60 l/min, 1 1/4": 230 l/min 1 1/2": 230 l/min
Testirani radni vek	200.000 ciklusa od 0-10 bar



## Dimenzije

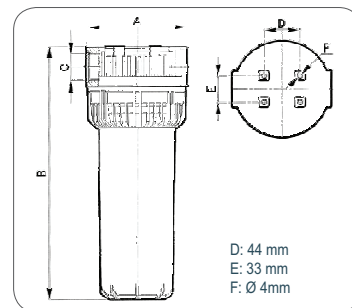

Dimenzije su date u tabeli

D: 44 mm  
E: 33 mm  
F: Ø 4mm




## Napomene

- Kućišta su dizajnirana za filter uloške dužine 9 3/4", 20"
- Filter ulošci se poručuju posebno



## Šema instalacije

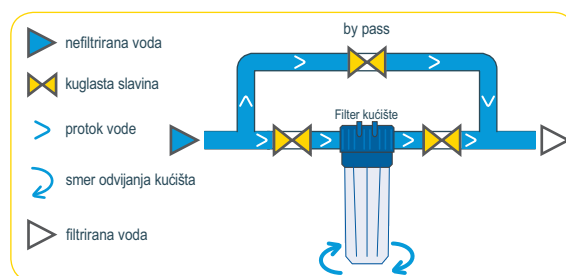

Preporučeni način instalacije



## Pojedinačno pakovanje



Pakovanje samo za kućišta 9 3/4"



QR kod

Za više informacija skenirajte QR kod